

Trench Field-stop IGBT Discrete

Parameter	Value	Unit
V_{CE}	1200	V
I_C	75	A
$V_{CE(sat)}$	2.11	V



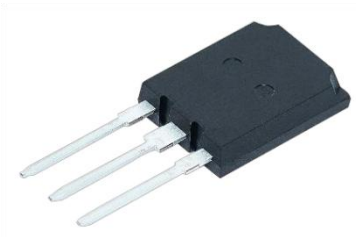

TO-247PLUS-3L

Features

- 1200V trench gate/field termination process
- Low switching losses
- Vcesat has a positive temperature coefficient

Applications

- Solar Inverter
- Welding Machine
- Uninterruptible power supplies

Maximum Ratings

Parameter	Symbol	Test condition	Value	Unit
Collector-Emitter voltage	V_{CE}	T_{vj}=25℃	1200	V
Gate to Emitter Voltage	V_{GE}		±20	V
Transient Gate to Emitter Voltage		t_P≤0.5μs,D<0.001	±30	V
collector current	I_C	T_C=25℃ T_C=100℃	150 75	A
Pulsed Collector Current	I_{pulse}	Pulse width limited by max junction temperature	300	A
Diode Forward Current	I_F	T_C=25℃ T_C=100℃	150 75	A
Power dissipation	P_{tot}	T_C=25℃ T_C=100℃	555 280	W
Operating Junction Temperature	T_J		-55 to+175	℃
Storage Temperature Range	T_{stg}		-55 to+150	℃
Thermal resistance junction - ambient	$R_{th(j-a)}$		40	℃/W

Characteristic Values(IGBT)

Parameter	Symbol	Test condition		Value			Unit
				Min.	Typ.	Max.	
Collector-emitter breakdown voltage	$V_{(BR)CES}$	V_{GE}=0V,I_C=0.25mA		1200			V
Collector-Emitter saturation voltage	V_{CEsat}	V_{GE}=15V,I_C=75A V_{GE}=15V,I_C=75A	T_{vj}=25℃ T_{vj}=175℃		2.11 3.03	2.60	V
Gate-Emitter threshold voltage	$V_{GE(th)}$	I_C=2.6mA,V_{GE}=V_{CE}	T_{vj}=25℃	5.0	5.6	6.5	V
Transconductance	G_{fs}	V_{CE}=20V ,I_C=75A			98.8		S

Gate charge	Q_G	I_C=75A,V_{GE}=15V,V_{CE}=960V T_{vj}=25℃		0.77		μC
Collector-emitter cut-off current	I_{CES}	V_{CE}=1200V,V_{GE}=0V T_{vj}=25℃			450	μA
Gate-emitter leakage current	I_{GES}	V_{CE}=0V,V_{GE}=20 V T_{vj}=25℃			100	nA
Input capacitance	C_{ies}	f=1MHz,V_{CE}=25V,V_{GE}=0V T_{vj}=25℃		7.72		nF
Output capacitance	C_{oes}			0.28		
Reverse transfer capacitance	C_{res}			0.13		
Turn-on delay time	$t_{d\,on}$	I_C=75A,V_{CE}=600V V_{GE}=±15V,R_G=10Ω (inductive load) T_{vj}=25℃		51		ns
Rise time	t_r			193		
Turn-off delay time	$t_{d\,off}$			180		
Fall time	t_f			98		
Turn-on energy loss per pulse	E_{on}			9.5		mJ
Turn-off energy loss per pulse	E_{off}			2.7		
Total switching energy	E_{tot}			12.2		
Turn-on delay time	t_{don}	I_C=75A,V_{CE}=600V V_{GE}=±15V,R_G=10Ω (inductive load) T_{vj}=175℃		40		mJ
Rise time	t_r			171		
Turn-off delay time	t_{doff}			202		
Fall time	t_f			119		
Turn-on energy loss per pulse	E_{on}			14.6		
Turn-off energy loss per pulse	E_{off}			3.5		
Total switching energy	E_{tot}			18. 1		
IGBT thermal resistance,junction - case	$R_{th(j-C)}$			0.27		K/W

Characteristic Values(Diode)

Parameter	Symbol	Test condition	Value			Unit
			Min.	Typ.	Max.	
Forward voltage	V_F	I_F=75A T_{vj}=25℃ I_F=75A T_{vj}=175℃		1.93 1.67	2.40	V
Peak reverse recovery current	I_{RM}	I_F=75A,-di$_F$/dt=320A/μs V_R=600V, V_{GE}=-15V T_{vj}=25℃		18		A
Reverse Recovered charge	Q_{rr}			4.21		μC
Reverse Recovery Time	t_{rr}			444		ns
Reverse recovered energy	E_{rec}			1.7		mJ
Peak reverse recovery current	I_{RM}	I_F=75A,-di$_F$/dt=320A/μs V_R=600V, V_{GE}=-15V T_{vj}=175℃		43		A
Reverse Recovered charge	Q_{rr}			15.36		μC
Reverse Recovery Time	t_{rr}			767		ns
Reverse recovered energy	E_{rec}			6.2		mJ
Diode thermal resistance,junction - case	$R_{th(j-C)}$			0.28		K/W

Typical Characteristics

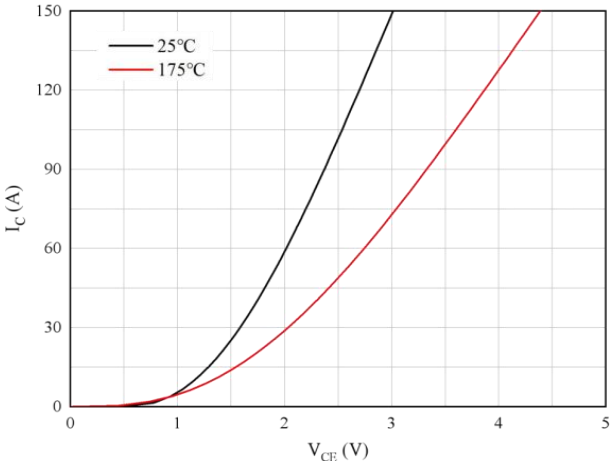


Fig 1.Typical output characteristics(V_{GE}=15V)

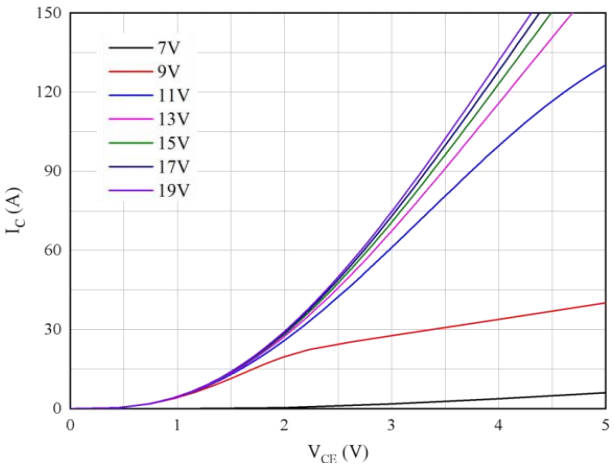


Fig 2.Typical output characteristics(T_{vj}=175℃)

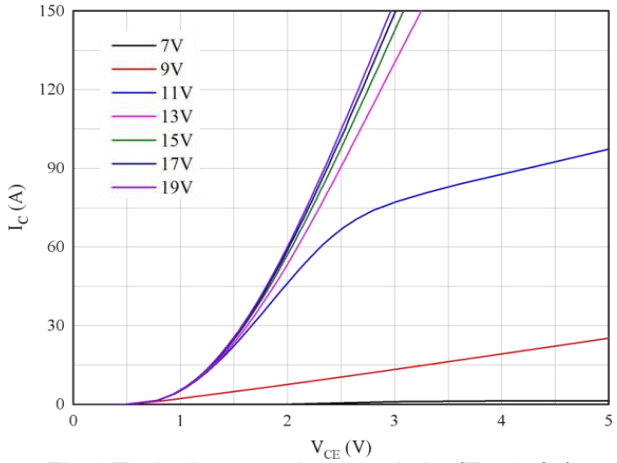


Fig 3.Typical output characteristics(T_{vj}=25℃)

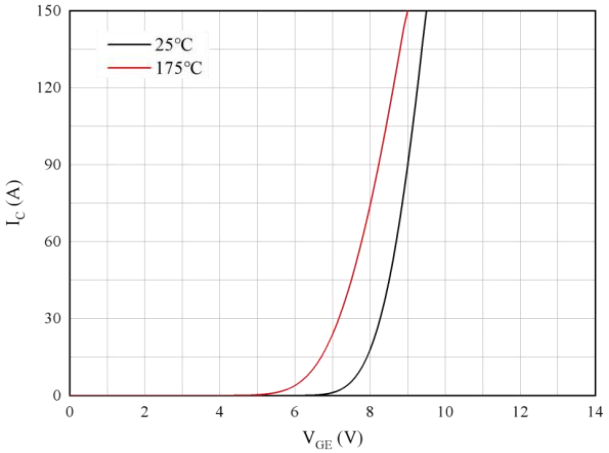


Fig 4.Typical transfer characteristic(V_{CE}=20V)

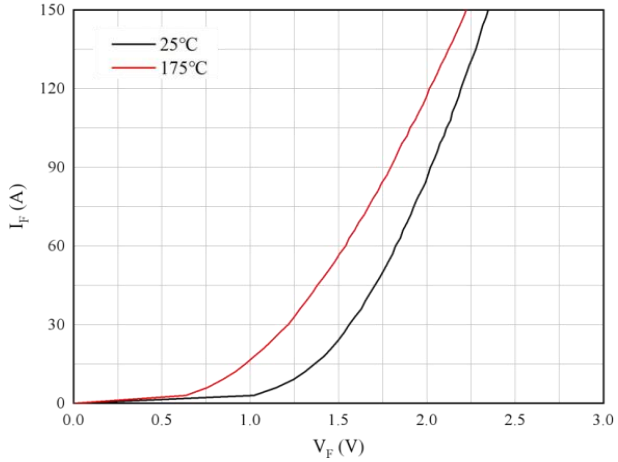


Fig 5.Forward characteristic of Diode

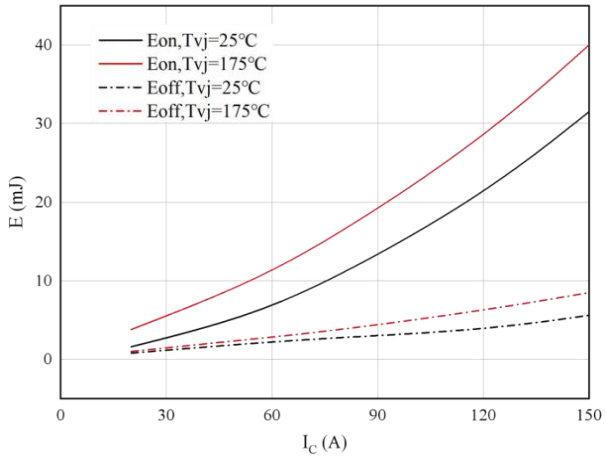


Fig 6.Switching losses of IGBT
V_{GE}=±15V,R_{Gon}=10Ω,R_{goff}=10Ω,V_{CE}=600V

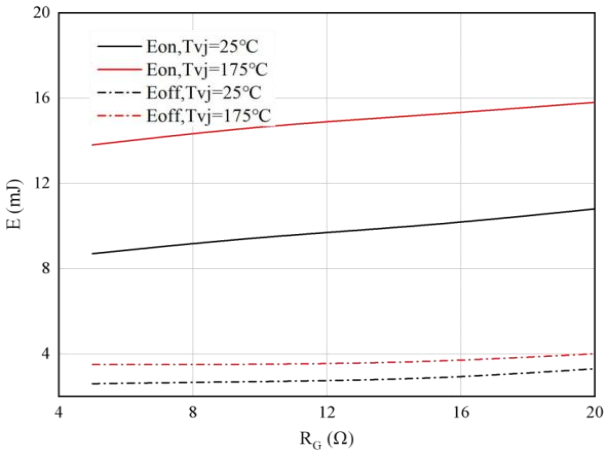


Fig 7.Switching losses of IGBT
V_{GE}=±15V,I_C=75A,V_{CE}=600V

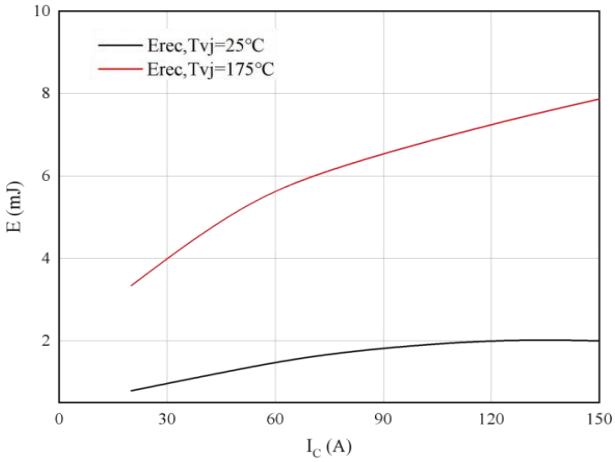


Fig 8.Switching losses of Diode
R_{gon}=10Ω,V_{CE}=600V

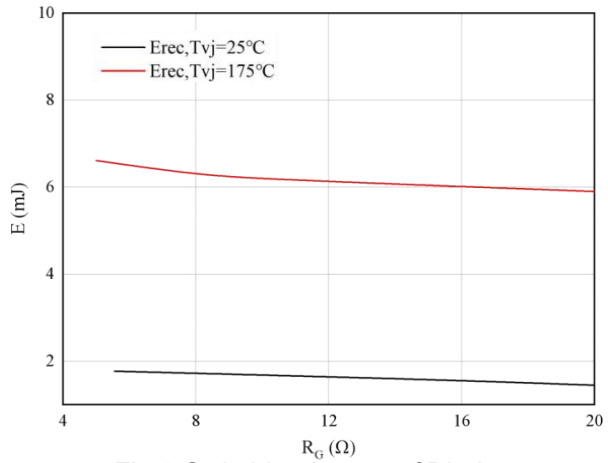


Fig 9.Switching losses of Diode
I_F=75A, V_{CE}=600V

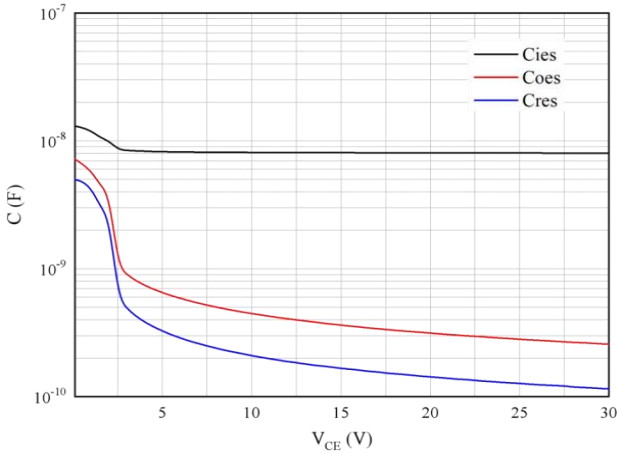


Fig 10.Capacitance characteristic

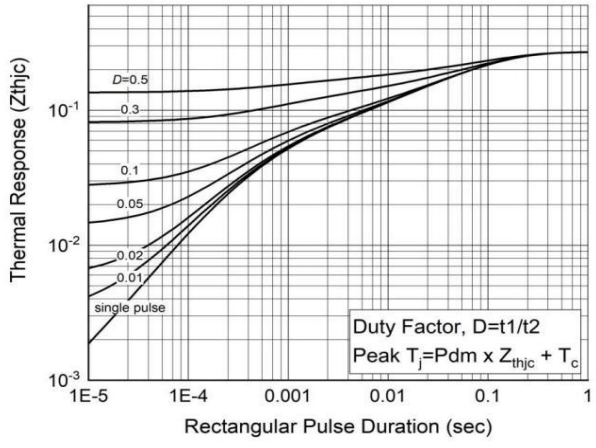


Fig 11.Transient thermal impedance IGBT,
Z_{thJC}=f(t)


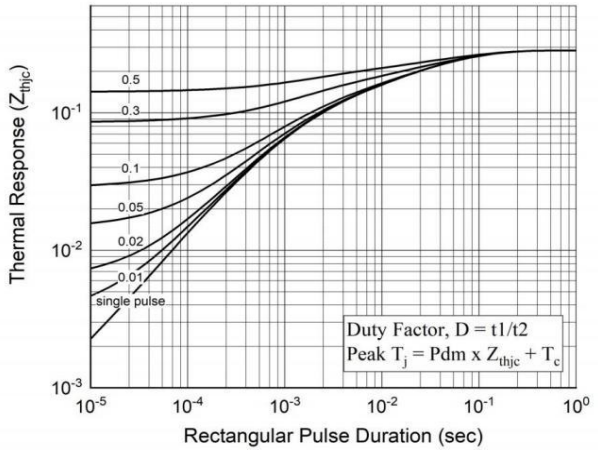


Fig 12.Transient thermal impedance FRD,
Z_{thJC}=f(t)

Package Outline (Unit：mm)

TO-247PLUS-3L

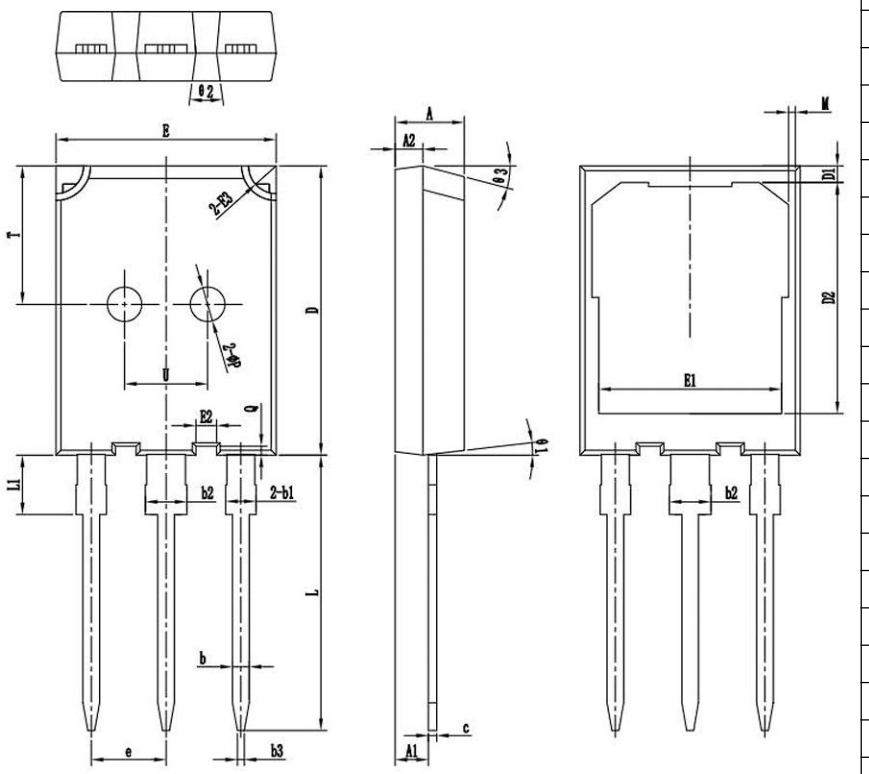

Dim.	Min	Nom	Max
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
b	1.15	1.20	1.25
b1	1.95	2.10	2.25
b2	2.95	3.10	3.25
b3	0.45	0.60	0.75
c	0.55	0.60	0.68
D	20.90	21.00	21.10
D1	1.00	1.20	1.40
D2	15.25	16.55	16.85
D3	0.58	0.68	0.78
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	1.25	1.45	1.65
E3	1.80	2.00	2.20
e	5.40	5.44	5.48
L	19.80	19.92	20.10
L1	-	-	4.30
ΦP	2.30	2.50	2.70
Q	0.50	0.68	0.80
T	9.80	10.00	10.20
U	5.80	6.00	6.20
θ1	5°	7°	9°
θ2	13°	16°	19°
θ3	13°	15°	17°
All Dimensions in millimeter			

***Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.