
N-Channel SGT MOSFET

Parameter	Value	Unit
VDS	85	V
RDS(on)	4.1	mΩ
ID	120	A

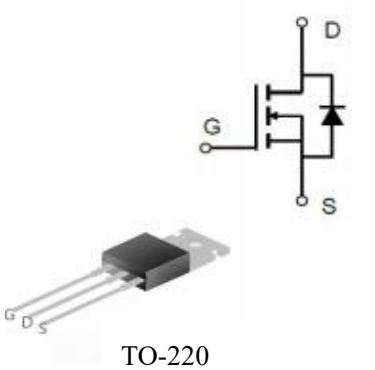

TO-220 TO-263

Package Marking and Ordering Information

Part No.	Package	Packing	Reel Size	Tape Width	SPQ
HMS120N08TX100	TO-220	Tube	N/A	N/A	50pcs
HMS120N08SX100	TO-263	Tape	N/A	N/A	1000pcs

FEATURES

- Uses advanced MOS technology
- Etremely low on-resistance RDS(on)
- Excellent QgxRDS(on) product(FOM)
- Qualified according to JEDEC criteria

APPLICATIONS

- Motor control and drive
- Battery management
- UPS (Uninterrupible Power Supplies)

MAXIMUM RATED VALUES

Parameter	Symbol	Value	Unit
Drain-Source Voltage	VDS	85	V
Continuous Drain Current	ID	-	A
TC = 25°C(Silicon limit)		150	
TC = 25°C(Package limit)		120	
TC = 100°C(Silicon limit)		95	
Pulsed Drain Current (TC = 25°C, tp limited by Tjmax)	ID pulse	480	A
Avalanche Energy, Single Pulse (L=0.5mH, Rg=25Ω)	EAS	196	mJ
Gate-Source Voltage	VGS	±20	V
Power Dissipation TC = 25°C	Ptot	189	W
Operating Junction Temperature	Tj,Tstg	-55 to 150	°C

THERMAL CHARACTERISTICS

Parameter	Symbol	Max. Value	Unit
Thermal Resistance, Junction–Case	RthJC	0.66	°C/W
Thermal Resistance, Junction – Ambient(min. footprint)	RthJA	58	

ELECTRICAL CHARACTERISTICS (at TJ = 25°C unless otherwise specified)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Static Characteristic							
Drain-Source Breakdown Voltage	BVDSS	VGS=0V , ID=250uA		85	97	-	V
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=250uA		2	3	4	V
Zero Gate Voltage Drain Current	IDSS	VDS=80V,VGS=0V	TJ=25°C	-	0.05	1	μA
			TJ=125°C	-	-	5	
Gate-Source Leakage Current	IGSS	VDS=0V, VGS= ±20V		-	±10	±100	nA
Drain-Source On-State Resistance	RDS(on)	VGS=10V,ID=50A	TO-220	-	4.1	4.8	mΩ
			TO-263	-	3.8	4.5	
Transconductance	gfs	VDS=5V, ID=40A		-	93	-	S
Dynamic Characteristic							
Input Capacitance	Ciss	VGS=0V, VDS=42.5V, f=1MHz			4027		pF
Output Capacitance	Coss				1207		pF
Reverse Transfer Capacitance	Crss				33		pF
Gate Total Charge	QG	VGS=10V, VDS=42.5V, ID=50A			64		nC
Gate-Source charge	Qgs				19		nC
Gate-Drain charge	Qgd				17		nC
Turn-On DelayTime	td(on)	VGS=10V, VDS=42.5V,ID=10A RG=3.5Ω		-	26	-	ns
Turn-On Rise Time	tr			-	47	-	ns
Turn-Off DelayTime	td(off)			-	54	-	ns
Turn-Off Fall Time	tf			-	28	-	ns
Gate Resistance	RG	VGS=0V, VDS=0V, f=1MHz		-	3.3	-	Ω
Body Diode Characteristic							
Body Diode Forward Voltage	VSD	VGS=0V,ISD=50A		-	0.9	1.4	V
Body Diode Reverse Recovery Time	trr	IS=30A,VGS=0V		-	66	-	ns
Body Diode Reverse Recovery Charge	Qrr	dI/dt=100A/ μs		-	79	-	nC

CHARACTERISTICS DIAGRAMS

Figure1：Output characteristics

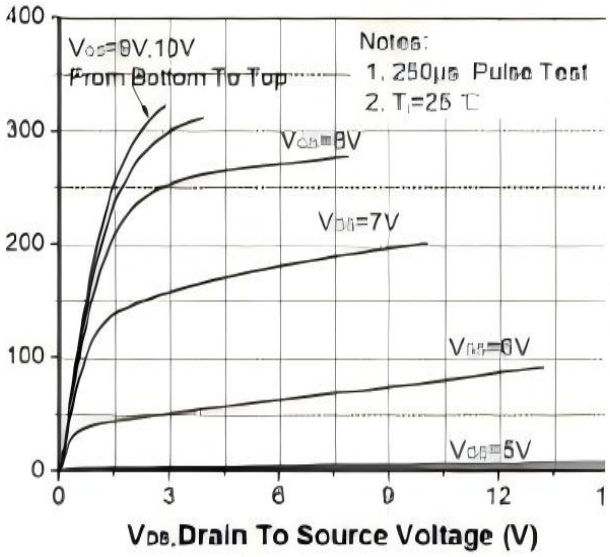


Figure2： Transfer characteristics

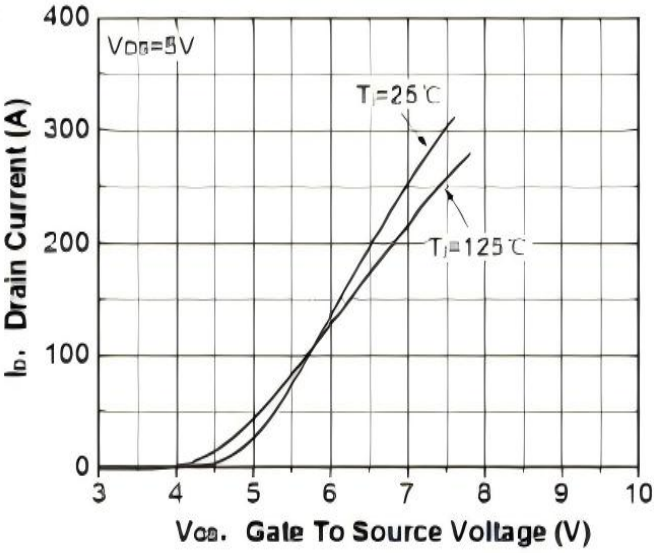


Figure3：Rds(on) vs Drain Current & Gate voltage

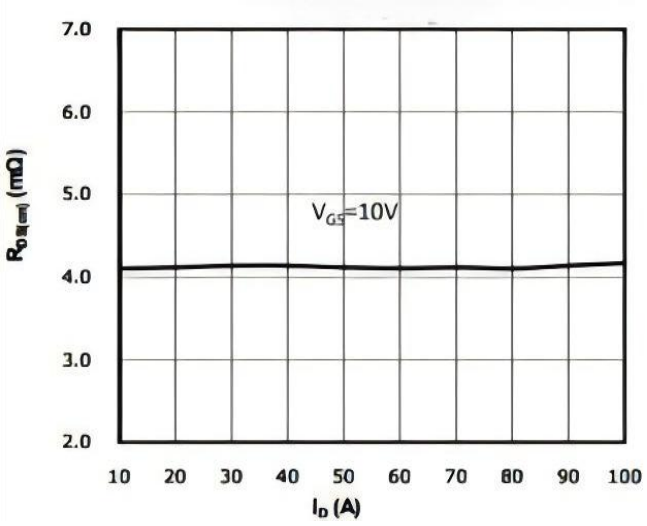


Figure4：Rds(on) vs Gate voltage

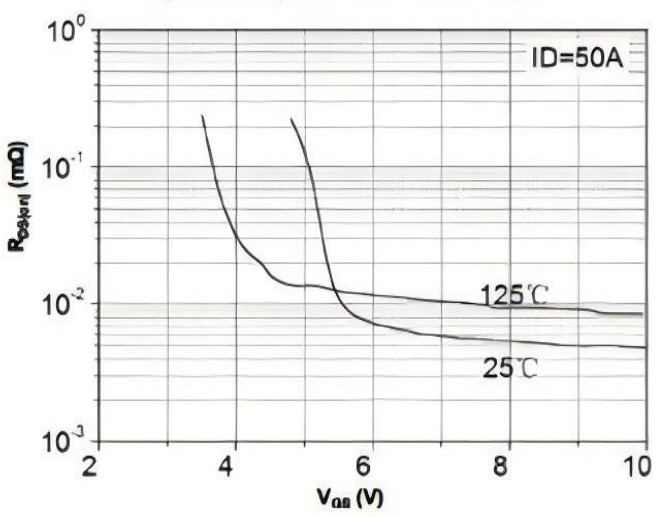


Figure5： Rds(on) vs Temperature

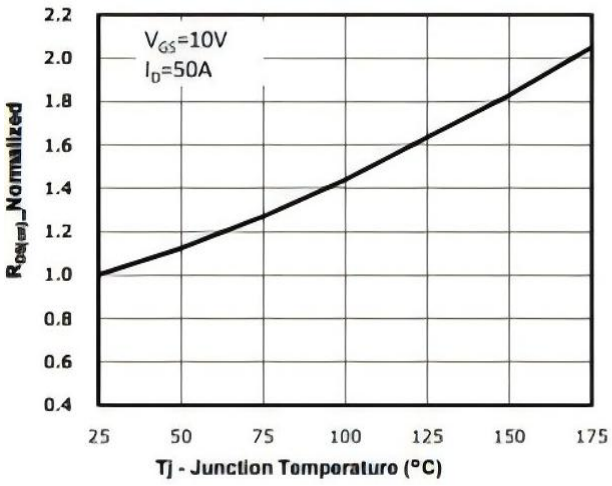


Figure6： Capacitance characteristics

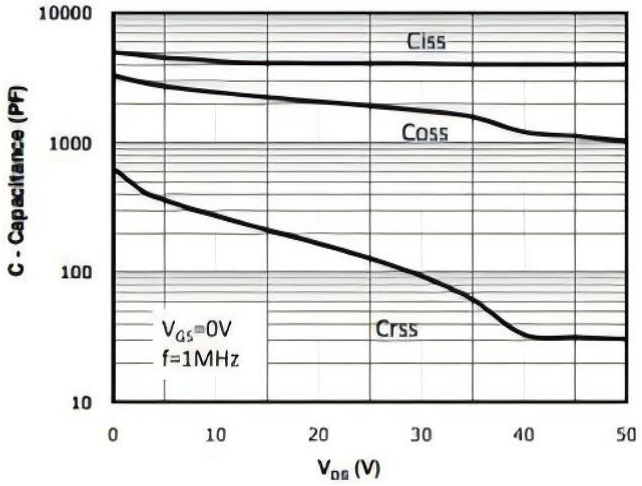


Figure7: Gate charge characteristics

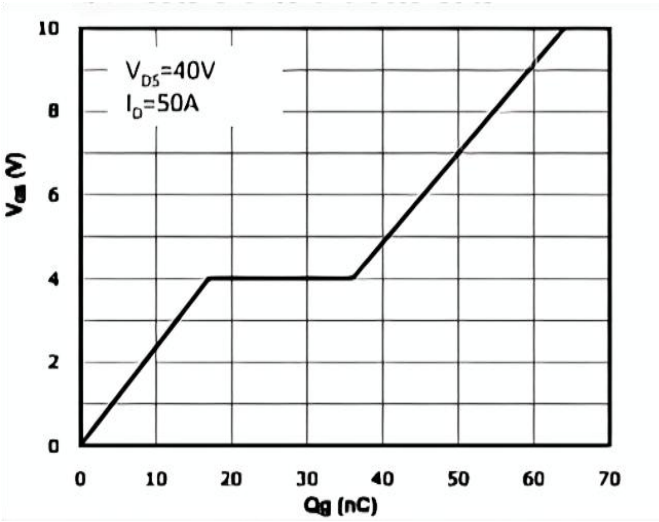


Figure8: Body diode forward characteristics

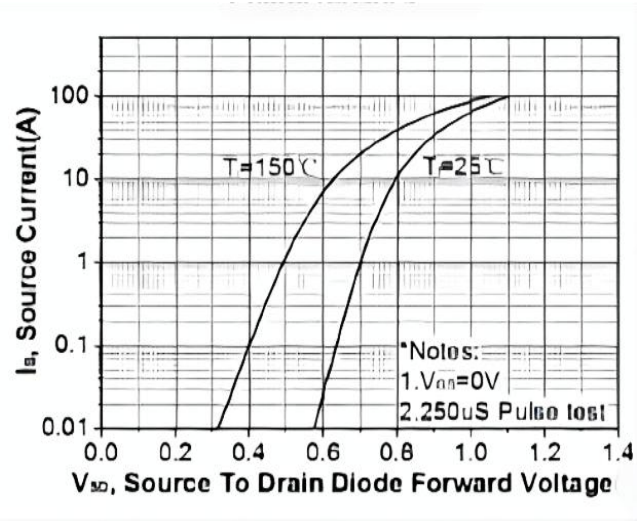


Figure9: Power Dissipation

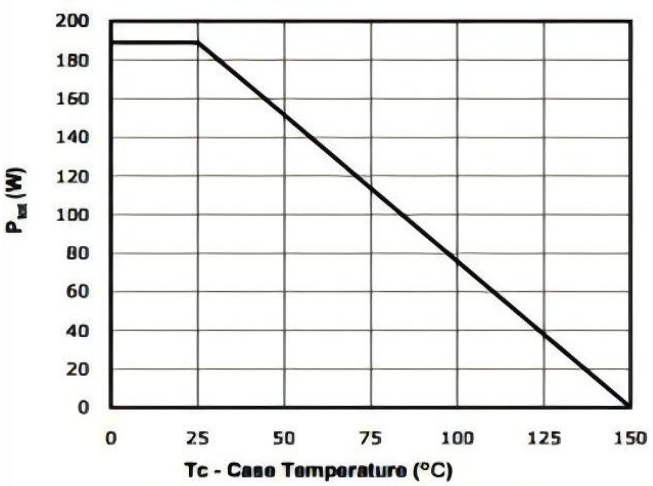


Figure10：Drain current derating

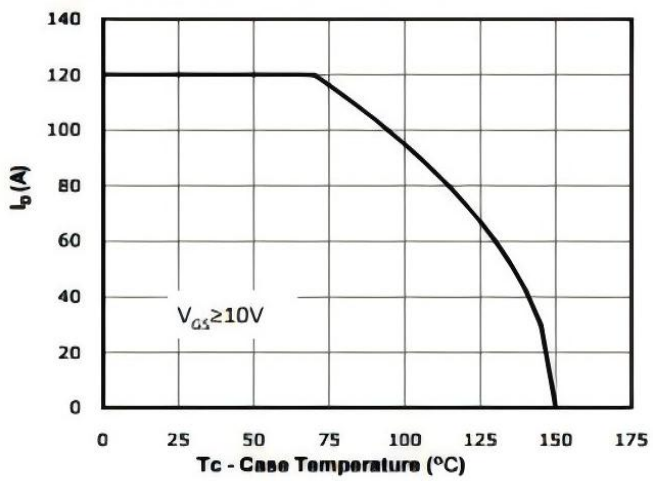


Figure11: Safe operating area



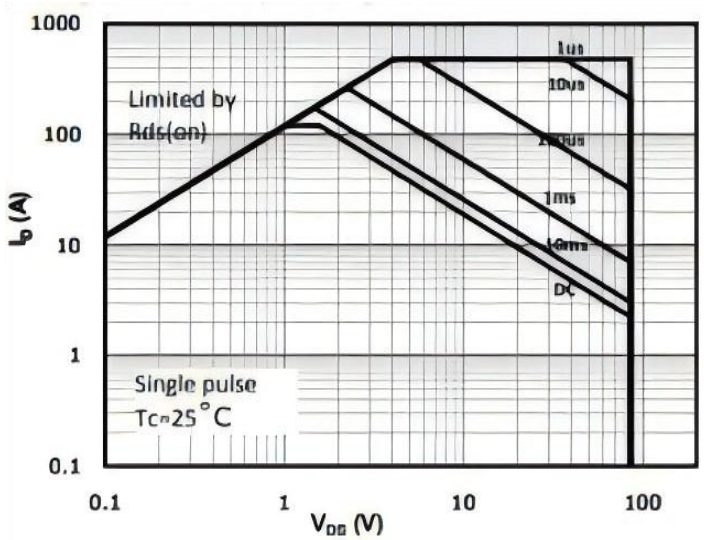


Figure12: Max. Transient thermal impedance

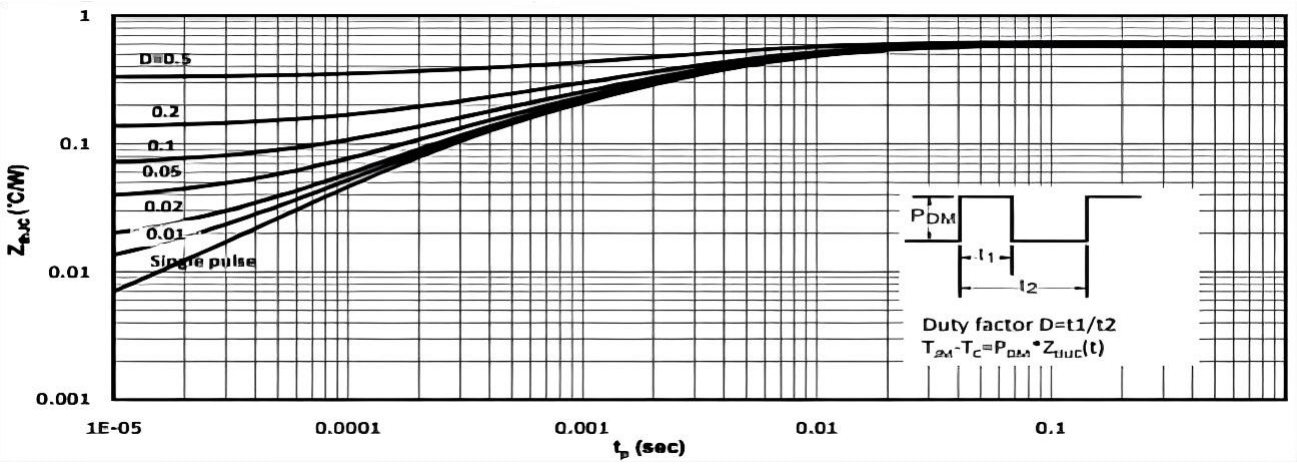


PACKAGE OUTLINE

TO-220

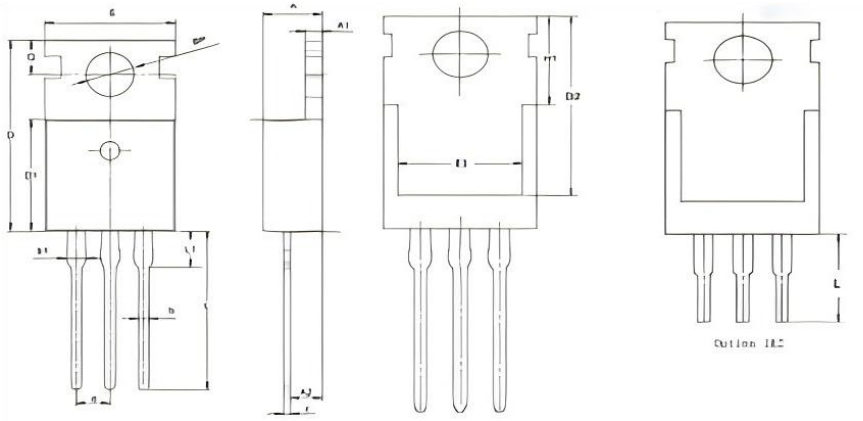

Symbol	Dimensions(Unit: mm)		
	Min	Typ	Max
A	4.30	4.50	4.70
A1	1.25	1.30	1.35
A2	2.25	2.40	2.55
b	0.70	0.80	0.90
b1	1.22	1.27	1.32
c	0.45	0.50	0.55
D	15.50	15.70	15.90
D1	8.90	9.20	9.40
D2	12.90	13.00	13.40
E	9.90	10.00	10.10
E1	7.80	7.95	8.10
e		2.54BSC	
H1	6.40	6.60	6.80
L	12.95	-	13.35
L (Option1)	0.30	0.50	0.70
L (Option2)	7.80	8.00	8.20
L1	-	-	3.95
P	3.50	3.60	3.70
Q	2.70	2.80	3.10

TO-263

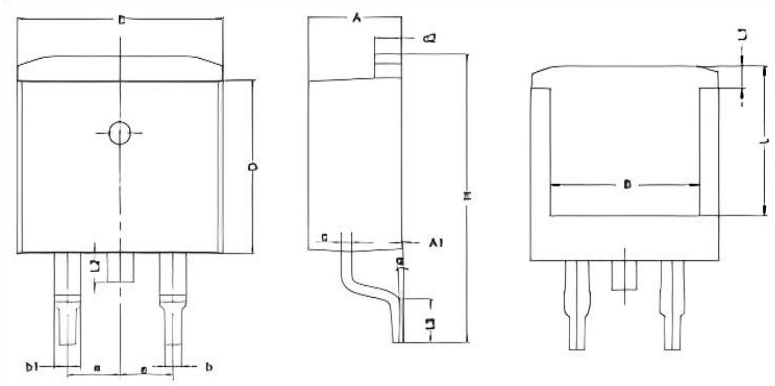

Symbol	Dimensions(Unit: mm)		
	Min	Typ	Max
A	4.40	4.55	4.70
A1	0.00	-	0.25
B	7.80	7.95	8.10
b	0.70	0.80	0.90
b1	1.22	1.27	1.32
c	0.45	0.50	0.55
c2	1.25	1.30	1.40
D	9.00	9.20	9.40
E	9.80	-	10.10
e		2.54BSC	
H	15.20	15.50	15.80
L	7.55	7.70	7.85
L1	1.10	1.20	1.30
L2	-	-	1.65
L3	2.30	-	2.70
q	-	-	6°

***Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.

Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.