


Surface Mount Super fast Recovery Rectifier

Parameter	Value	Unit
V_{RRM}	50~600	V
$I_{F(AV)}$	2.0	A
T_{RR}	35	ns

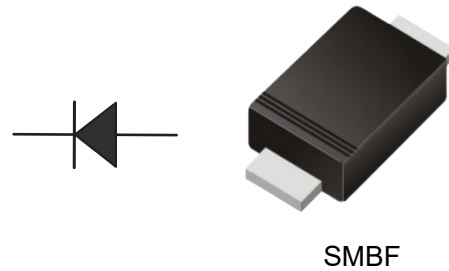

SMBF

Features

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Super fast reverse recovery time

Applications

- For use in high-frequency rectification and free-wheeling applications in switching-mode converters and inverters for consumer electronics, computer systems, and telecommunications.

Absolute Maximum Ratings and Characteristics (Ta=25°C unless otherwise noted)


Parameter	Symbol	ES2ABF	ES2BBF	ES2CBF	ES2DBF	ES2EBF	ES2GBF	ES2JBF	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Rectified Current at Tc = 125°C	$I_{F(AV)}$	2.0							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	50							A
Maximum Forward Voltage at 2A	V_F	1.0				1.25		1.7	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	5 100							μA
Typical Junction Capacitance at VR=4V, f=1MHz	C_j	28							pF
Maximum Reverse Recovery Time (1)	t_{rr}	35							ns
Typical Thermal Resistance (2)	$R_{\theta JA}$ $R_{\theta JC}$	60 18							°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150							°C

Notes:

- (1) Measured with $I_F = 0.5A$, $I_R = 1A$, $I_{rr} = 0.25A$.
 (2) P.C.B. mounted with 2.0" X 2.0" (5 X 5cm) copper pad areas.

Typical characteristics

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

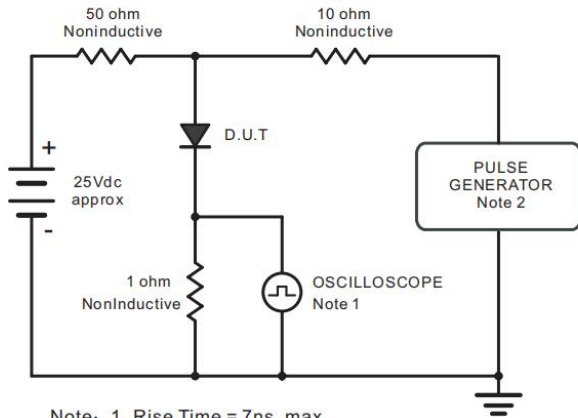

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

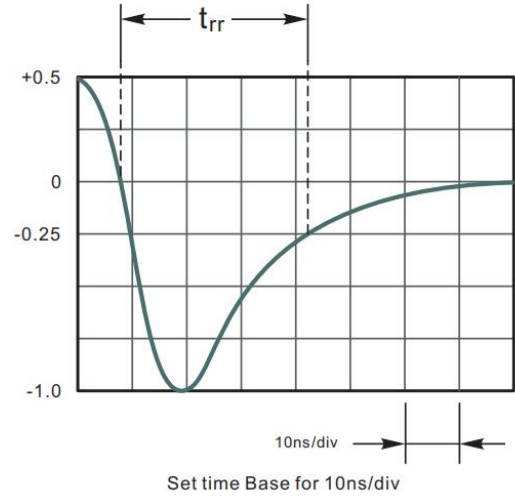


Fig.2 Maximum Average Forward Current Rating

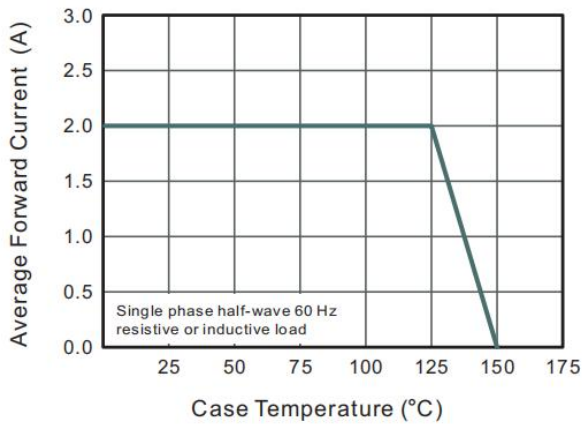


Fig.3 Typical Reverse Characteristics

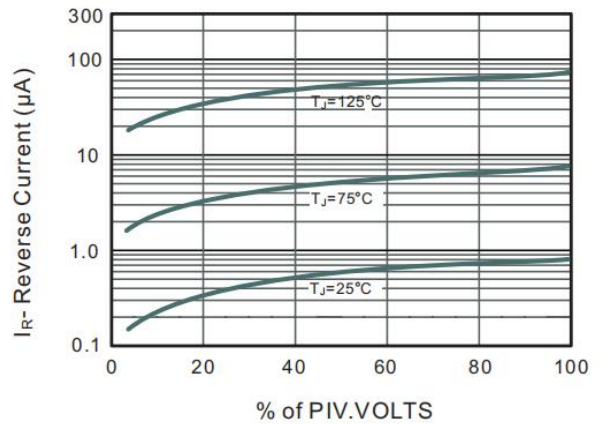


Fig.4 Typical Forward Characteristics

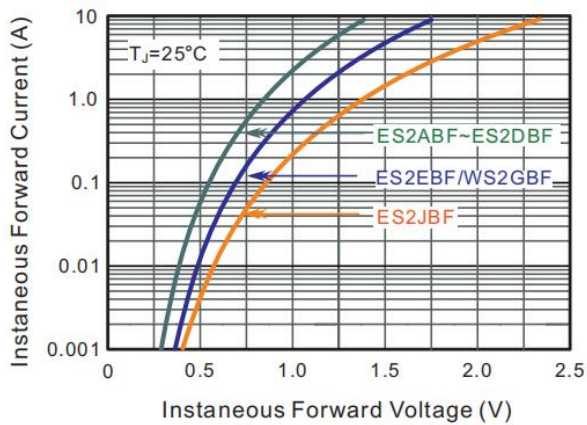


Fig.5 Typical Junction Capacitance


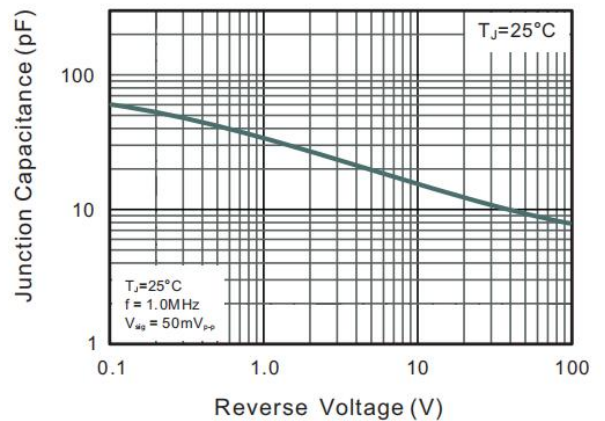


Fig.6 Maximum Non-Repetitive Peak Forward Surge Current

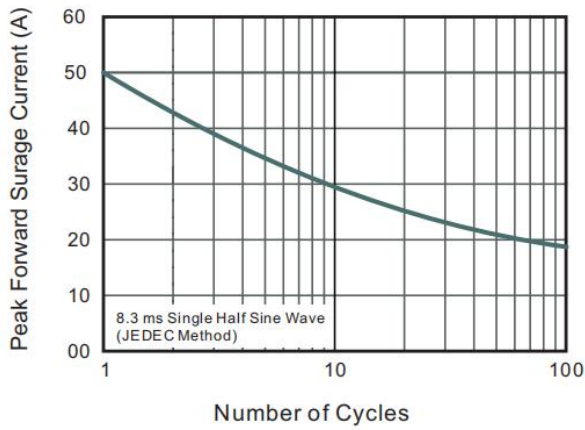


Package Outlines

Plastic surface mounted package; 2 leads

SMBF

UNIT		A	C	D	E	H _E	e	g	\angle
mm	max	1.45	0.26	4.4	3.7	5.5	2.2	0.9	6°
	min	1.25	0.18	4.2	3.5	5.1	1.9		
mil	max	57	10	173	146	216	86	35	
	min	49	7	165	138	200	75		

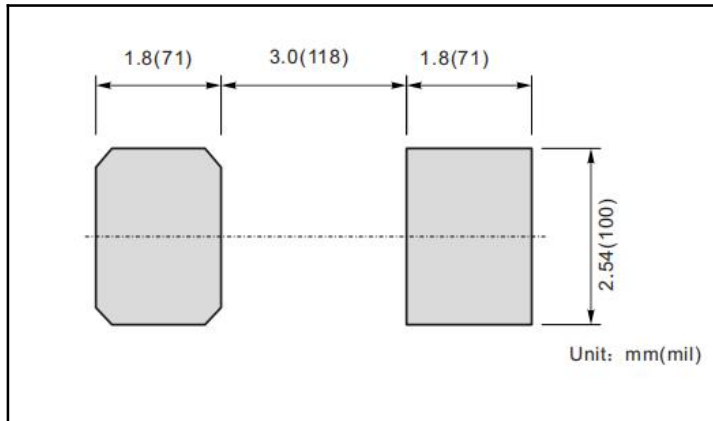The recommended mounting pad size**Marking**

Type number	Marking code
ES2ABF	E2AB
ES2BBF	E2BB
ES2CBF	E2CB
ES2DBF	E2DB
ES2EBF	E2EB
ES2GBF	E2GB
ES2JBF	E2JB

***Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.

Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.