

Surface Mount Fast Recovery Rectifiers

Parameter	Value	Unit
V_{RRM}	50~1000	V
$I_{F(AV)}$	3.0	A



DC-214AB/SMC

Features

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time

Applications

- For use in fast-switching rectification in power supplies, inverters, converters, and as free-wheeling diodes in consumer and telecommunications equipment.

Absolute Maximum Ratings and Characteristics (at $T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	RS3A	RS3B	RS3D	RS3G	RS3J	RS3K	RS3M	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	90							A
Maximum Forward Voltage at 3A	V_F	1.3							V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 125^\circ\text{C}$	I_R	5 100							μA
Typical Junction Capacitance at $V_R = 4\text{V}$, $f = 1\text{MHz}$	C_j	40							pF
Maximum Reverse Recovery Time (1)	t_{rr}	150				250	500		ns
Typical Thermal Resistance (2)	$R_{\theta JA}$ $R_{\theta JC}$	45 15							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{stg}	-55 ~ +150							$^\circ\text{C}$

Notes:

- (1) Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{rr} = 0.25\text{A}$.
 (2) P.C.B. mounted with 2.0" X 2.0" (5 X 5cm) copper pad areas.

Typical characteristics

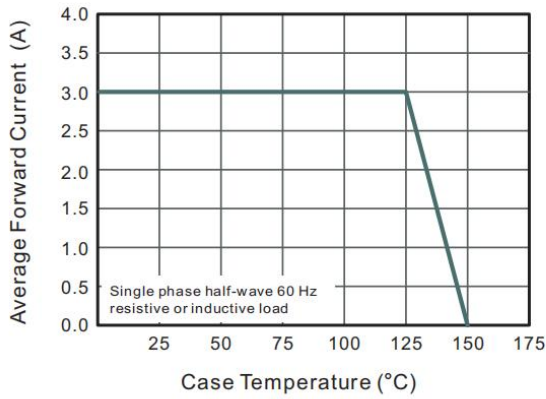


Fig.3 Typical Instaneous Forward Characteristics

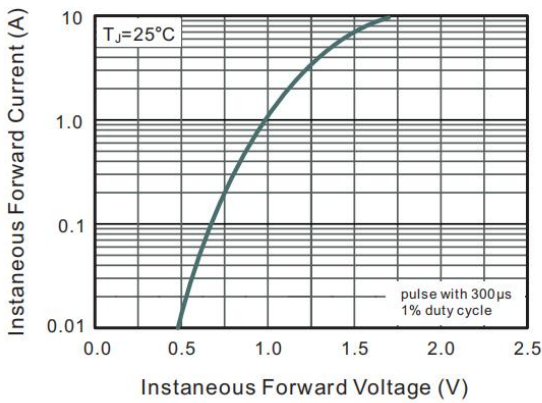


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current




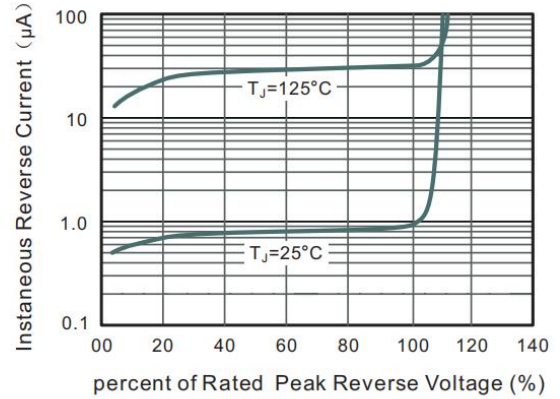


Fig.4 Typical Junction Capacitance

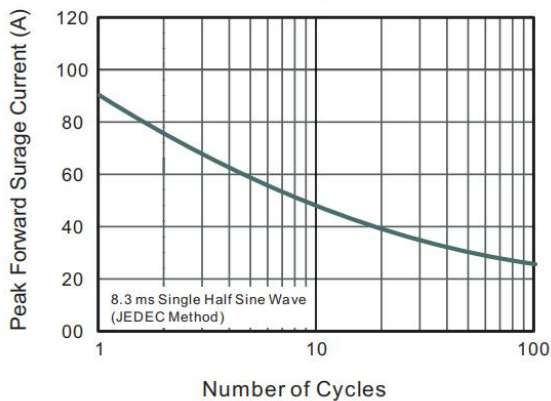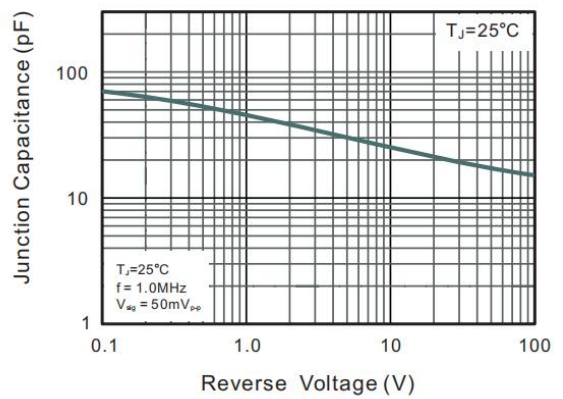

Package outlines


Plastic surface mounted package; 2 leads

DO-214AB/SMC

SMC mechanical data

UNIT		A	E	D	B	A ₁	C	L	b
mm	max	2.62	7.1	6.2	8.3	0.21	0.31	1.6	3.25
	min	2.00	6.6	5.6	7.7	0.05	0.15	0.9	2.75
mil	max	103	280	244	327	8.3	12	63	128
	min	79	260	220	303	2.0	5.9	35	108

The recommended mounting pad size

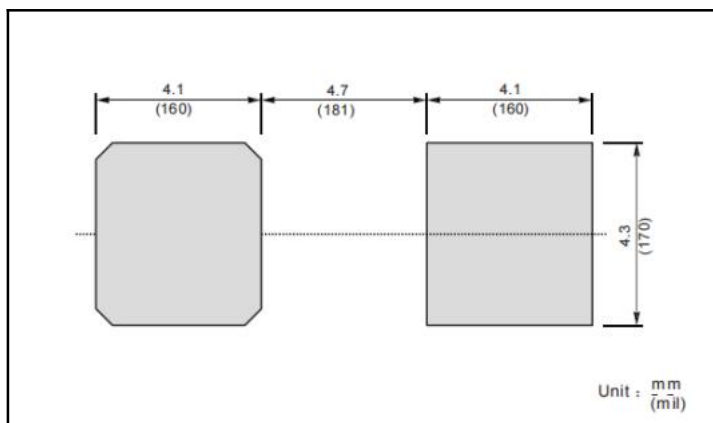

Marking

Type number	Marking code
RS3A	RS3A
RS3B	RS3B
RS3D	RS3D
RS3G	RS3G
RS3J	RS3J
RS3K	RS3K
RS3M	RS3M

***Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.

Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.