


Silicon Carbide Schottky Diode 650V/10A

Parameter	Value	Unit
V_{RRM}	650	V
I_F (TC = 25°C)	20	A
Qc	28	nC

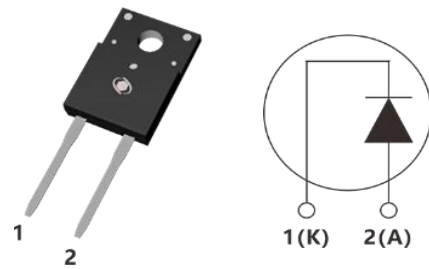

TO-220F-2L

Inner

FEATURES

- Zero reverse recovery current
- Zero forward recovery voltage
- Temperature independent switching behavior
- High temperature operation
- High frequency operation

APPLICATIONS

- SMPS, PFC
- Solar application, UPS, EV/HEV
- Motor drives, Wind turbine, Rail traction

MAXIMUM RATED VALUES (at $T_J = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	650	V
Surge Peak Reverse Voltage	V_{RSM}	650	V
Continuous Forward Current TC = 25°C TC = 125°C TC = 134.5°C	I_F	22.2 11.4 10	A
Repetitive Peak Forward Surge Current TC= 25°C, tp= 10ms, Half Sine Pulse, D= 0.1, 1000Cycle	I_{FRM}	40	A
Non-Repetitive Forward Surge Current TC= 25°C, tp= 10ms, Half Sine Pulse	I_{FSM}	80	A
i^2t Value TC= 25°C, tp= 10ms, Half Sine Pulse	$\int i^2 dt$	32	A ² s
Power Dissipation TC= 25°C TC= 110°C	P_{tot}	63 27	W
Operating Junction Range	T_J	-55 to +175	°C
Storage Temperature Range	T_{stg}	-55 to +175	°C
Mounting Torque, M3 Screw	M	1	Nm

ELECTRICAL CHARACTERISTICS (at $T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Value			Unit
			min.	typ.	max.	
DC Blocking Voltage	VDC		650	-	-	V
Forward Voltage	V _F	IF = 10A T _J = 25°C T _J = 175°C	- -	1.37 1.74	1.7 2.5	V
Reverse Current	I _R	VR = 650V T _J = 25°C T _J = 175°C	- -	0.2 2	50 100	μA
Total Capacitance	C	f = 1MHz VR = 0V VR = 200V VR = 400V	- - -	536 55 53	- - -	pF
Total Capacitive Charge	QC	VR = 400V T _J = 25°C	-	28	-	nC
Capacitance Stored Energy	EC	VR = 400V	-	6.8	-	μJ

THERMAL CHARACTERISTICS

Parameter	Symbol	Test Condition	Value			Unit
			min.	typ.	max.	
Thermal Resistance, junction-case	R _{th(j-c)}		-	2.37	-	°C/W

TYPICAL CHARACTERISTICS CURVES

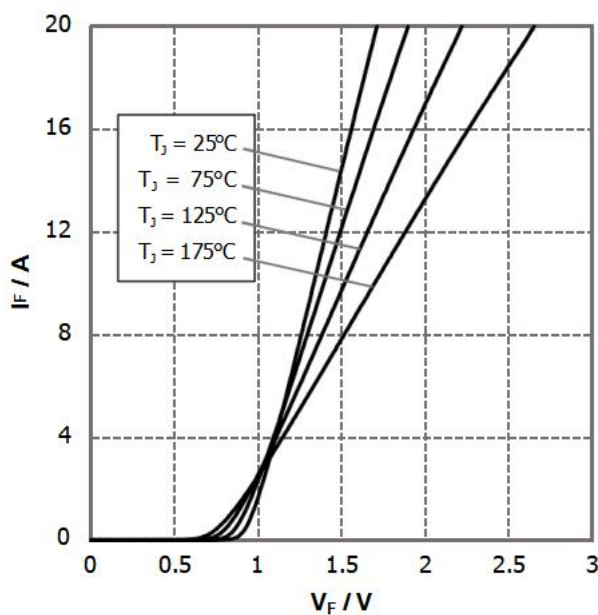


Figure 1. Forward Characteristics

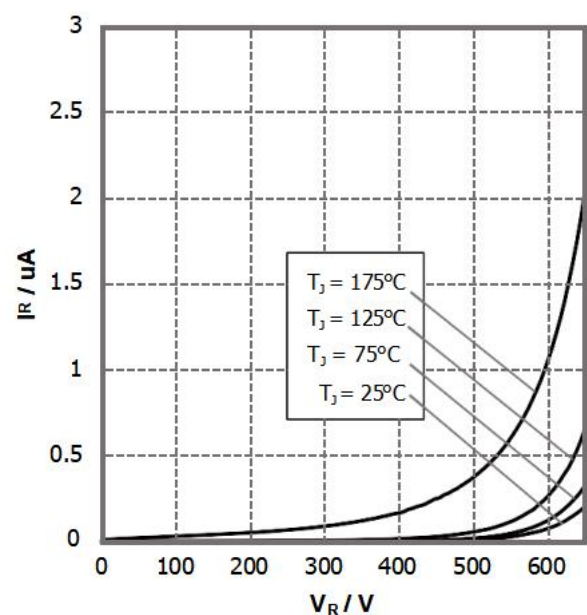


Figure 2. Reverse Characteristics

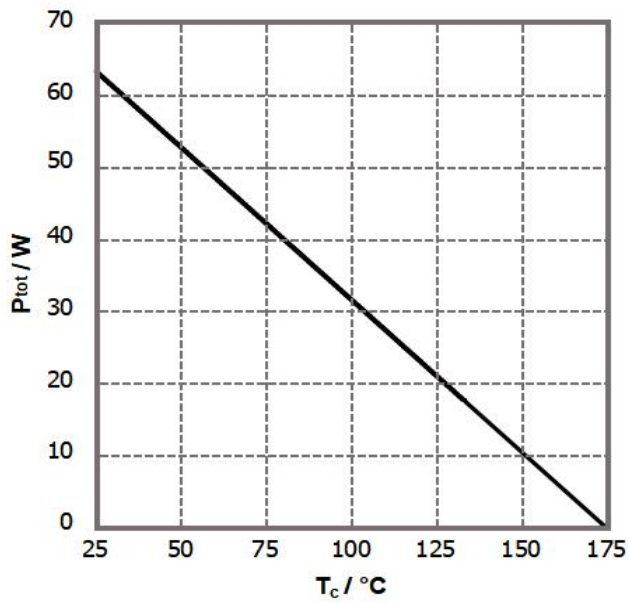


Figure 3. Power Derating

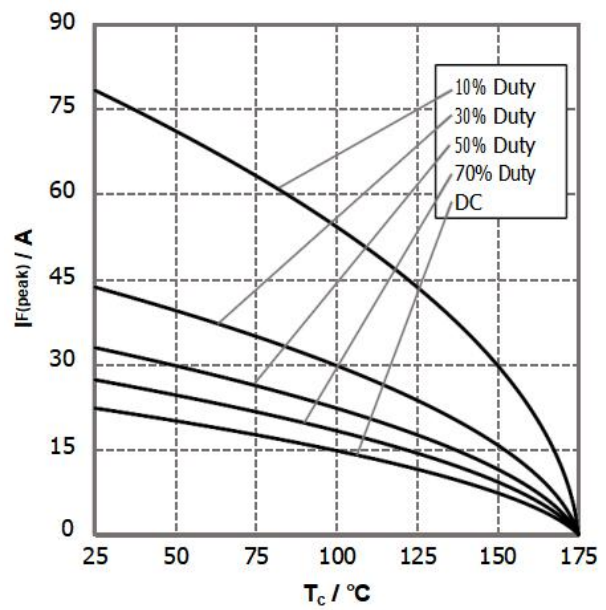


Figure 4. Current Derating
Valid for switching of above 20kHz,
excluding D.C. curve

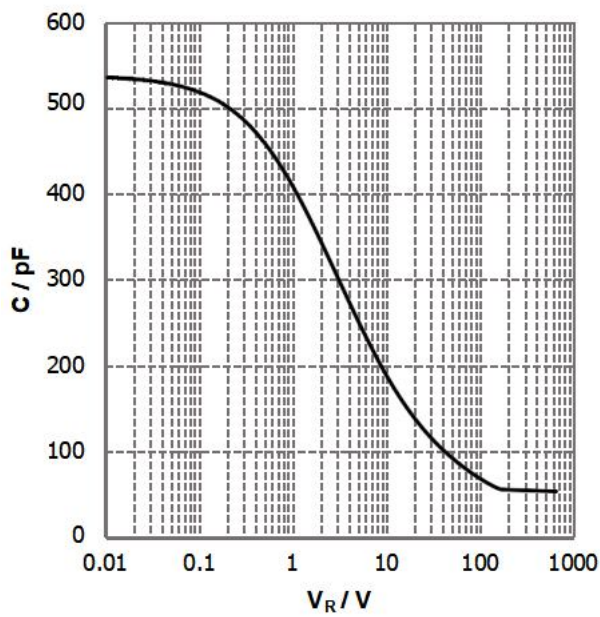


Figure 5. Capacitance vs. Reverse Voltage

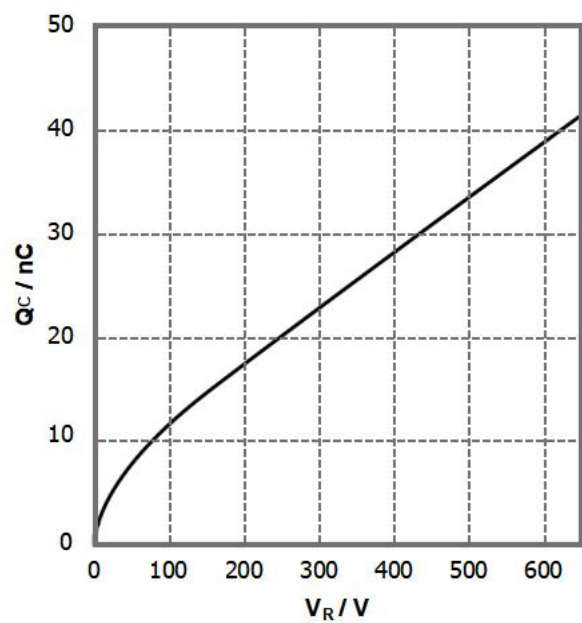


Figure 6. Reverse Charge vs. Reverse Voltage

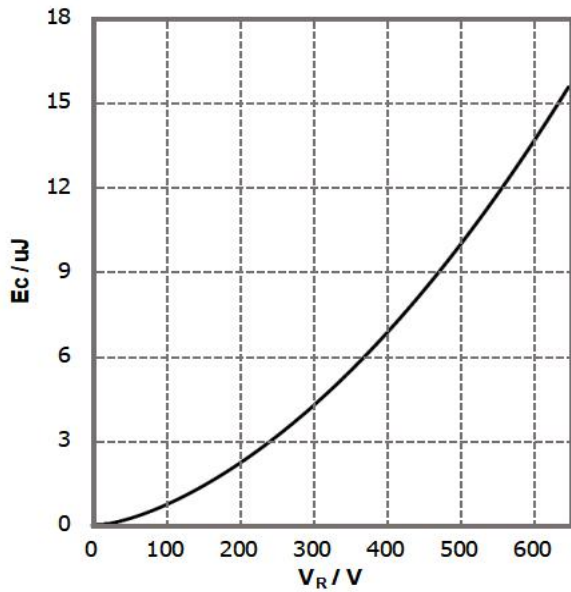


Figure 7. Capacitance Stored Energy


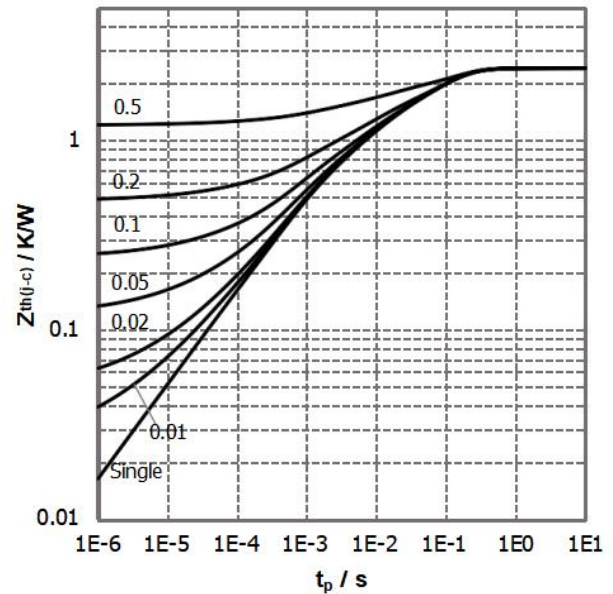


Figure 8. Transient Thermal Impedance

PACKAGE OUTLINES

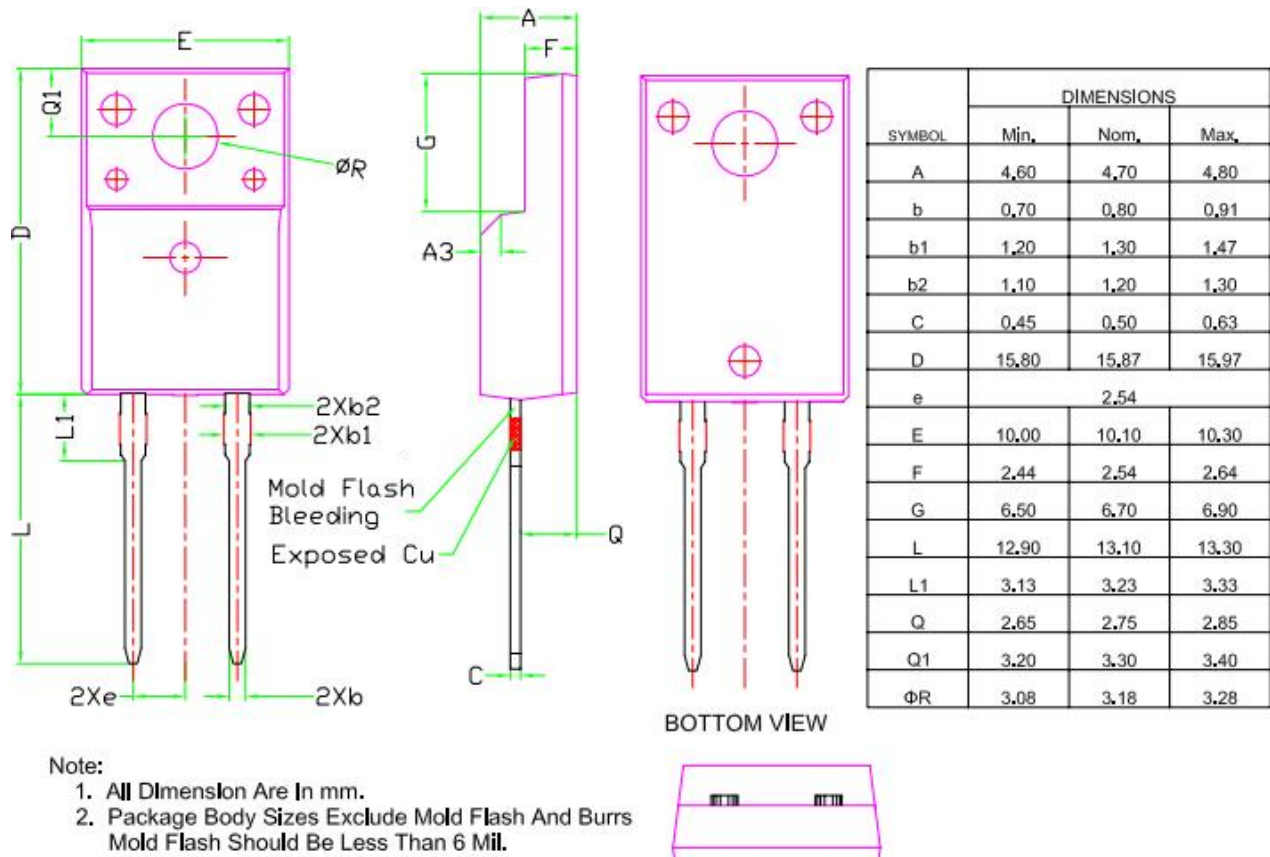

***Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.

Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.