
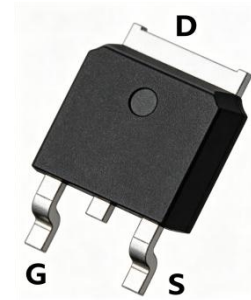


Silicon Carbide Power MOSFET

| Parameter | Value | Unit |
|--------------|-------|------------|
| V_{DS} | 650 | V |
| I_D | 11 | A |
| $R_{DS(ON)}$ | 380 | m Ω |
| Q_G | 21.3 | nC |

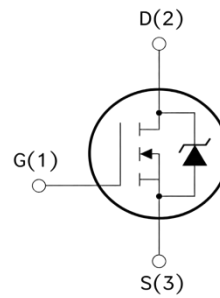

TO-252

Features

- High Speed Switching with Low Capacitances
- High Blocking Voltage with Low $R_{DS(on)}$
- Low impedance package with driver source pin
- Easy to parallel and simple to drive

Applications

- Motor Drives
- Battery Chargers
- Photovoltaic-storage-charging
- High Voltage DC/DC Converters
- Switched-Mode Power Supply(SMPS)

Absolute Maximum Ratings (at $T_J=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Conditions | Value | Unit |
|--|-----------------|---|-------------|--------------------|
| Drain-source Voltage | V_{DS} | $V_{GS}=0V$ | 650 | V |
| Gate-source Voltage | V_{GS} | Absolute maximum values | -10/+22 | V |
| | V_{GSop} | Recommended operational values | 0/+18 | |
| Drain Current (continuous) | I_D | $V_{GS}=15V; T_C=25^\circ\text{C}$ | 11 | A |
| | | $V_{GS}=15V; T_C=175^\circ\text{C}$ | 9 | |
| Drain Current (pulsed) | I_{DM} | $V_{GS}=15V; T_C=25^\circ\text{C}$ | 22 | A |
| Power Dissipation | P_D | $T_C=25^\circ\text{C}; T_J=175^\circ\text{C}$ | 52 | W |
| Operating Junction and Storage Temperature Range | T_J, T_{stg} | - | -55 to +175 | $^\circ\text{C}$ |
| Thermal Resistance from Junction to Case | $R_{\theta JC}$ | - | 2.88 | $^\circ\text{C/W}$ |

Electrical Characteristics

| Parameter | Symbol | Conditions | Value | | | Unit |
|---|--------------|--|-------|------|------|------------|
| | | | Min. | Typ. | Max. | |
| Static characteristics (at $T_C=25^\circ\text{C}$ unless otherwise specified) | | | | | | |
| Drain-Source Breakdown Voltage | $B_{V_{DS}}$ | $V_{GS}=0V; I_D=500\mu A$ | 650 | - | - | V |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{GS}=V_{DS}; I_{DS}=1.8mA$ | 2.7 | - | 4.5 | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=650V; V_{GS}=0V; T_J=25^\circ\text{C}$ | - | - | 10 | μA |
| Gate-Body Leakage Current | I_{GSS} | $V_{GS}=18V; V_{DS}=0V$ | - | - | 250 | nA |
| Static Drain-Source on Resistance | $R_{DS(on)}$ | $V_{GS}=15V; I_D=5A$ | - | 380 | 500 | m Ω |
| | | $V_{GS}=15V; I_D=5A; T_J=175^\circ\text{C}$ | - | 325 | - | |
| | | $V_{GS}=18V; I_D=5A$ | - | 260 | - | |
| | | $V_{GS}=18V; I_D=5A; T_J=175^\circ\text{C}$ | - | 270 | - | |
| Dynamic characteristics (at $T_C=25^\circ\text{C}$ unless otherwise specified) | | | | | | |
| Input Capacitance | C_{iss} | $V_{DS}=500V; f=100KHz; V_{GS}=0V; T_J=25^\circ\text{C}$ | - | 254 | - | pF |
| Output Capacitance | C_{oss} | | - | 20.2 | - | |
| Reverse Transfer Capacitance | C_{rss} | | - | 2.4 | - | |
| Total Gate Charge | Q_G | $V_{DS}=500V; V_{GS}=0/+15V; I_D=5A; T_J=25^\circ\text{C}$ | - | 21.3 | - | nC |
| Gate-Source Charge | Q_{GS} | | - | 6.7 | - | |
| Gate-Drain Charge | Q_{GD} | | - | 11.5 | - | |
| Gate Resistor | R_G | $f=1MHz$ | - | 14.3 | - | Ω |
| Turn-on Delay Time | $t_{d(on)}$ | $V_{DS}=500V; V_{GS}=0/+15V; I_D=5A; R_{g(ext)}=10\Omega$ | - | 24 | - | ns |
| Rise Time | t_r | | - | 42 | - | |
| Turn-off Delay Time | $t_{d(off)}$ | | - | 26.8 | - | |
| Fall Time | t_f | | - | 76 | - | |

Reverse SiC Diode Characteristics(at $T_J=25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Conditions | Values | | | Units |
|----------------------------------|-----------|---|--------|------|------|-------|
| | | | Min. | Typ. | Max. | |
| Diode Forward Voltage | V_{FSD} | $V_{GS}=0V; I_F=3A; T_J=25^\circ\text{C}$ | - | 3.5 | - | V |
| Continuous Diode Forward Current | I_S | $V_{GS}=0V; T_J=25^\circ\text{C}$ | - | 11 | - | A |
| Reverse Recovery Time | t_{RR} | $V_R=500V; V_{GS}=0V; I_F=5A; di/dt=530A/\mu s; T_J=25^\circ\text{C}$ | - | 17.8 | - | ns |
| Reverse Recovery Charge | Q_{RR} | | - | 33.7 | - | nC |
| Peak Reverse Recovery Current | I_{RRM} | | - | 3.5 | - | A |

Typical Characteristics

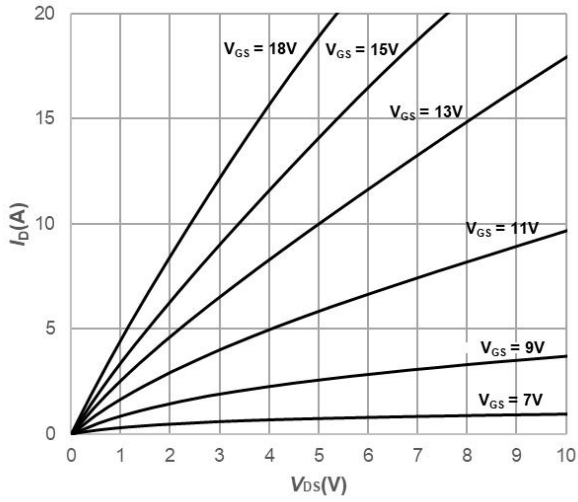


Fig1. Output Characteristics $T_j=25^\circ\text{C}$

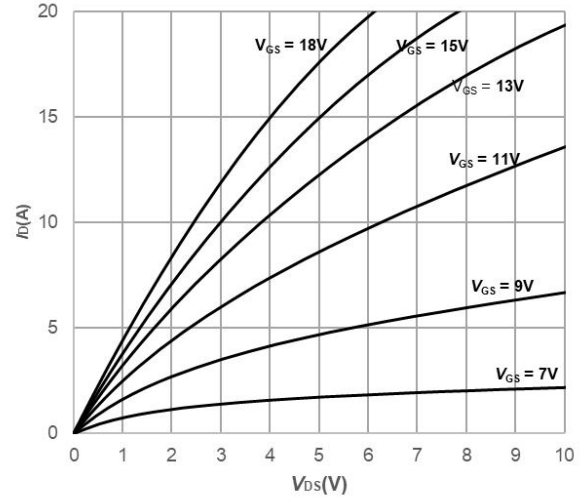


Fig2. Output Characteristics $T_j=175^\circ\text{C}$

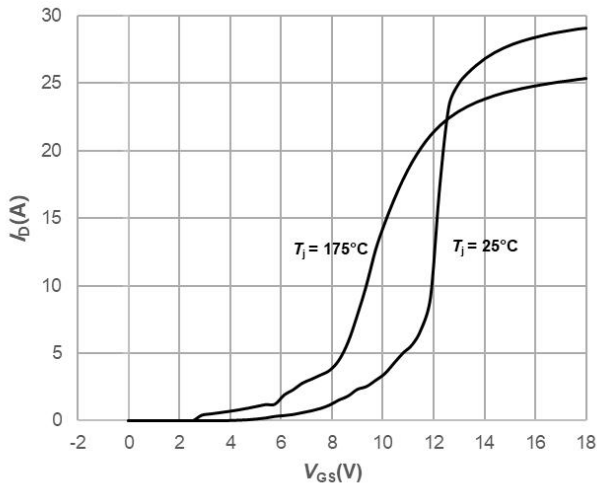


Fig3. Typical Transfer Characteristics $V_{DS}=20\text{V}$

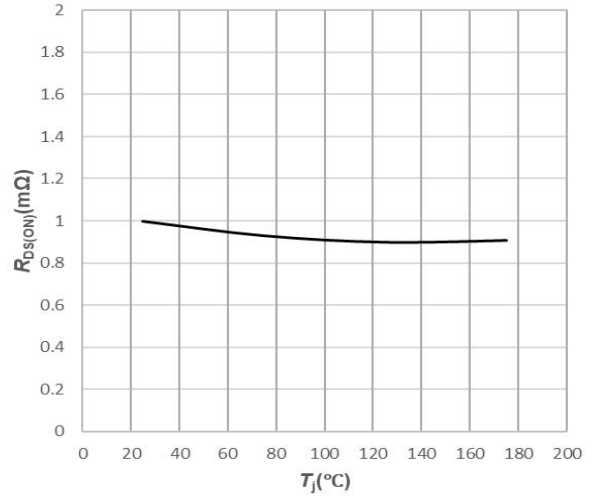


Fig4. Normalized On-Resistance vs. Temperature $V_{GS}=15\text{V}$

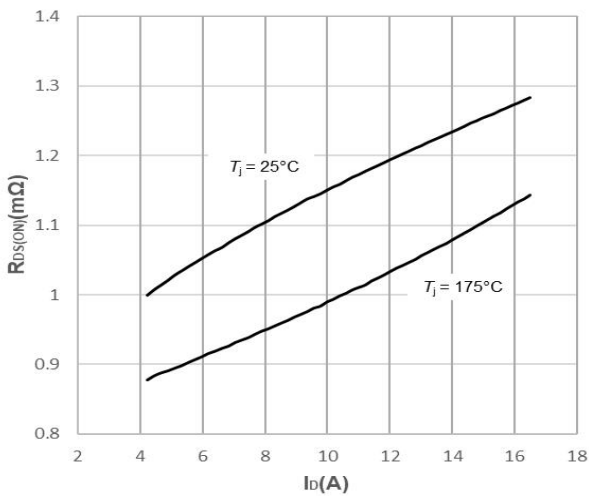


Fig5. Normalized On-Resistance vs. Drain Current For Various Temperatures $V_{GS}=15\text{V}$

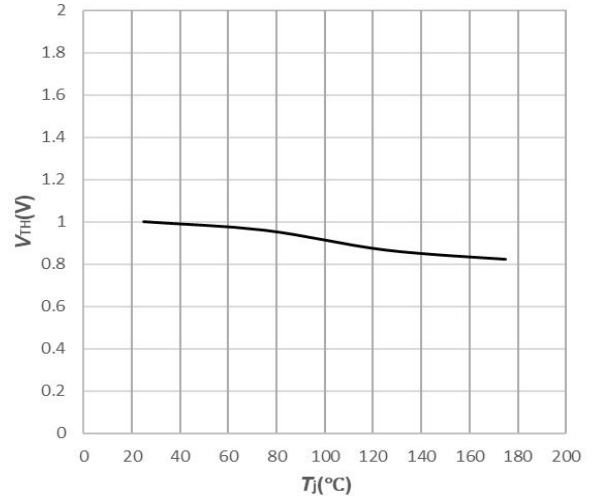


Fig6. Normalized Threshold Voltage vs. Temperature $I_D=5\text{mA}$

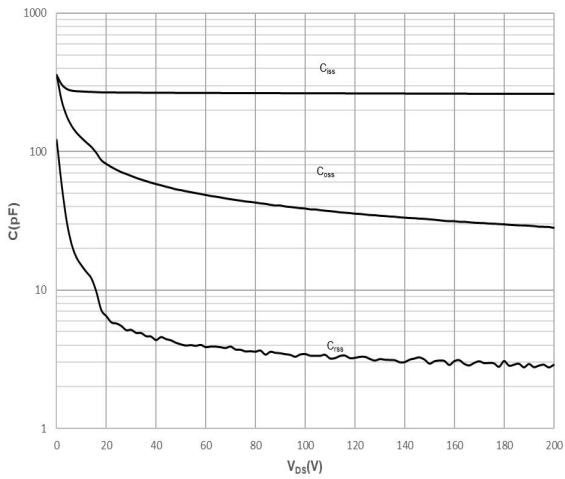


Fig7. Capacitances vs. Drain-Source Voltage (0-200V)
 VGS=0V, f=1MHz

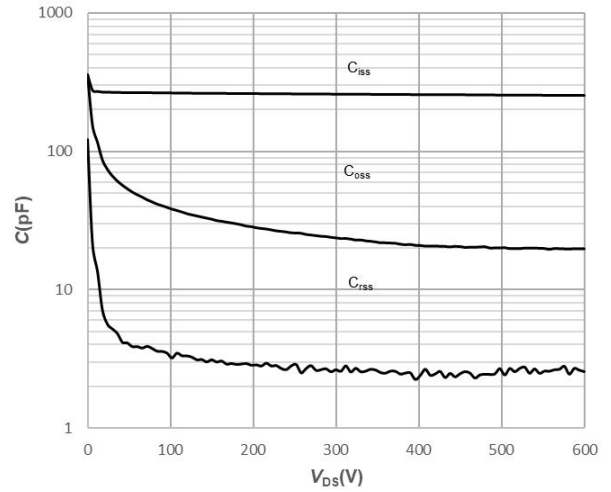


Fig8. Capacitances vs. Drain-Source Voltage (0-600V)
 VGS=0V, f=1MHz


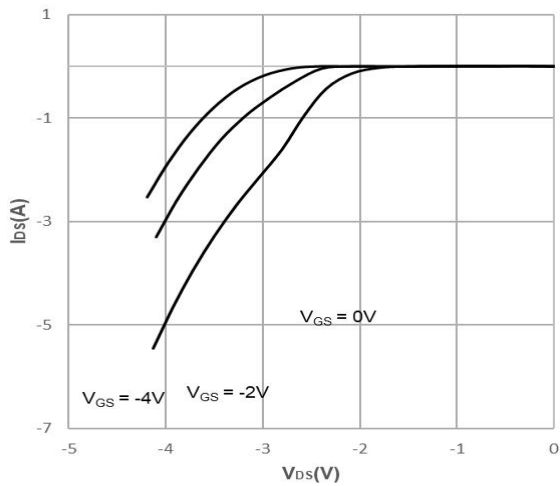


Fig9. Body Diode Characteristics Tj=25°C

Package Outlines(Unit:mm)

TO-252

Unit: mm

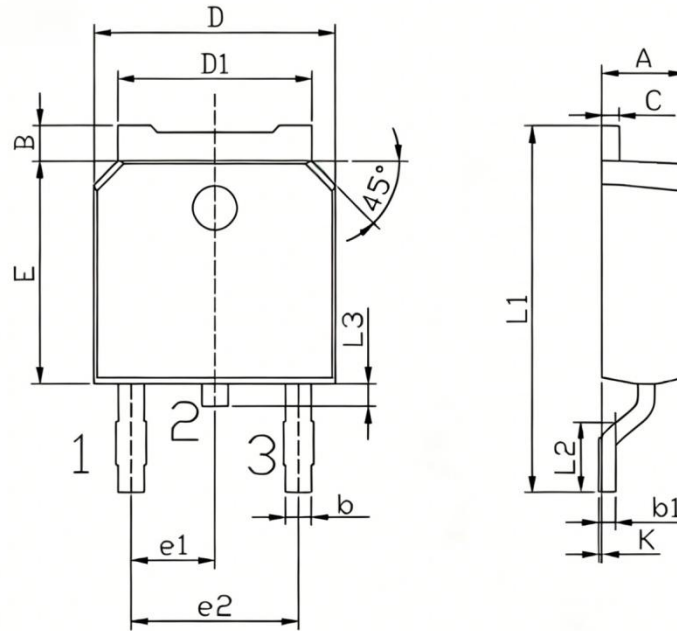

| Symbol | Dimensions In Millimeters | | Symbol | Dimensions In Millimeters | |
|--------|---------------------------|------|--------|---------------------------|-------|
| | Min | Max | | Min | Max |
| A | 2.20 | 2.40 | E | 5.95 | 6.25 |
| B | 0.95 | 1.25 | e1 | 2.24 | 2.34 |
| b | 0.70 | 0.90 | e2 | 4.43 | 4.73 |
| b1 | 0.45 | 0.55 | L1 | 9.85 | 10.35 |
| C | 0.45 | 0.55 | L2 | 1.25 | 1.75 |
| D | 6.45 | 6.75 | L3 | 0.60 | 0.90 |
| D1 | 5.20 | 5.40 | K | 0.00 | 0.10 |

***Important Usage Information and Disclaimer**

The specifications of Zhuhai Hypersemi Co., Ltd. products are not guarantees of product characteristics. They reflect typical performance expected in standard applications, which may vary with specific uses. Users must conduct prior testing for their applications and make necessary adjustments.

Users are responsible for the safety of applications utilizing our products and must implement adequate safety measures to prevent physical injury, fire, or other risks in case of product failure. It is the user's duty to ensure that application designs comply with all applicable laws and standards. Our products must not be used in any applications where a product failure could reasonably result in personal injury, unless specifically authorized in a signed document by Zhuhai Hypersemi Co., Ltd.

No representations or warranties are made regarding the accuracy or completeness of this information, including any claims of non-infringement of third-party intellectual property rights. Zhuhai Hypersemi Co., Ltd. assumes no liability for any applications or uses of its products and does not grant any licenses to its intellectual property rights or those of others. We also make no claims regarding non-infringement of third-party intellectual property rights that may arise from applications.

Due to technical requirements, our products may contain hazardous substances. For details, please contact your nearest sales office. This document replaces all previous information and may be updated. We reserve the right to make changes.